

Flat face quick couplings ISO16028


Stainless Steel AISI 316

Material : Stainless Steel AISI 316

Seals : FKM and PTFE

Working temperature: -30°C / +150°C

Working pressure : 150-300 bar

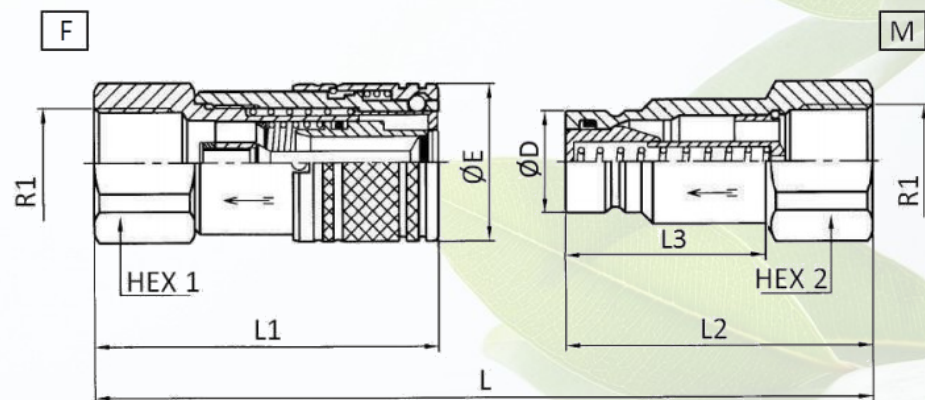

Item no.	R1	Working pressure (bar)	ISO size	BG size	Coupling	Water flow (l/min)	Flow MAX (l/min)	L	L1	L2	L3	HEX 1	HEX 2	ØD	ØE
Male															
ISO16028M-1/4S	1/4" BSP	300	6,3	1	M	12	24	86	-	48	36	-	22	16,2	-
ISO16028M-3/8S	3/8" BSP	250	10	2	M	23	46	118	-	67	40,6	-	24	19,7	-
ISO16028M-1/2S	1/2" BSP	250	12,5	3	M	45	90	125	-	68	44,5	-	32	24,6	-
ISO16028M-3/4S	3/4" BSP	200	16	4A	M	74	90	130	-	70	50	-	36	27	-
ISO16028M-1S	1" BSP	150	19	4	M	100	200	153	-	82	57	-	45	30,6	-
Female															
ISO16028F-1/4S	1/4" BSP	300	6,3	1	F	12	24	86	48	-	-	22	-	-	28
ISO16028F-3/8S	3/8" BSP	250	10	2	F	23	46	118	68	-	-	27	-	-	32
ISO16028F-1/2S	1/2" BSP	250	12,5	3	F	46	90	125	74	-	-	32	-	-	38
ISO16028F-3/4S	3/4" BSP	200	16	4A	F	45	90	130	79	-	-	36	-	-	38
ISO16028F-1S	1" BSP	150	19	4	F	100	200	153	93	-	-	45	-	-	48