


High-pressure ball valves

Two-ways
DRS2



USE AND OPERATION

These valves are used to open or close oil flow in a circuit even with maximum pressure.

MATERIALS AND FEATURES

Body: zinc-plated steel


Internal parts: ground and chromium-plated steel

Seals: BUNA N standard and POM seals

Ball type and seals: any leakage

APPLICATIONS

Connect indifferently A or P to the ports where flow has to be blocked. Flow is blocked with lever at 90° (position 1) and free with lever in line (position 2).

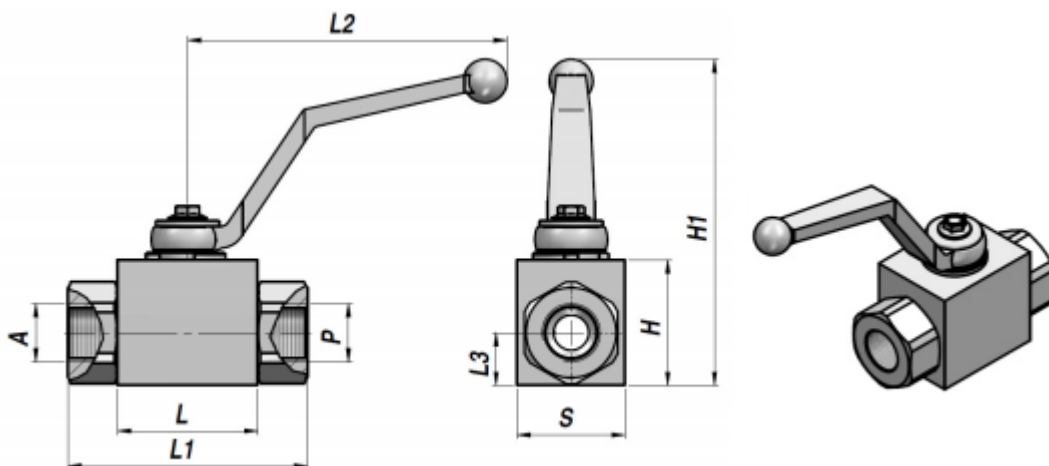

Model	A – P BSP	Q Max L/min.	P Max. Bar	L	L1	L2	L3	H	H1	S	Weight kg
DRS2 ¼"	¼"	25	500	42,4	71	110	14,5	35	91,5	25	0,50
DRS2 ⅜"	⅜"	35	500	44,4	73	110	17,4	40	96,5	35	0,65
DRS2 ½"	½"	60	500	48,4	83	110	18	43	99,5	37	0,77
DRS2 ¾"	¾"	100	400	62,5	95	180	23,4	55	106,5	45	1,46