


SFILO EXTENSION EXPANSION ZYLINDERSTUF	DIAMETRO DIAMETER DIAMETRE DURCHMESS [mm]	SPINTA THRUST POUSSEE KRAFT [kN]	(200 bar)
1	154	373	
2	135	286	
3	120	226	
4	105	173	
5	90	127	
6	75	88	

Data:	2005/01/27
Cliente.Naz:	3020515-DK
Data ordine:	2005/01/27

MODIFICHE	
Data:	
Data:	
Data:	
Data:	
Data:	
Data:	
Data:	
Data:	
Data:	
Data:	

NOTE	
Elementi fosfatati allo zinco	

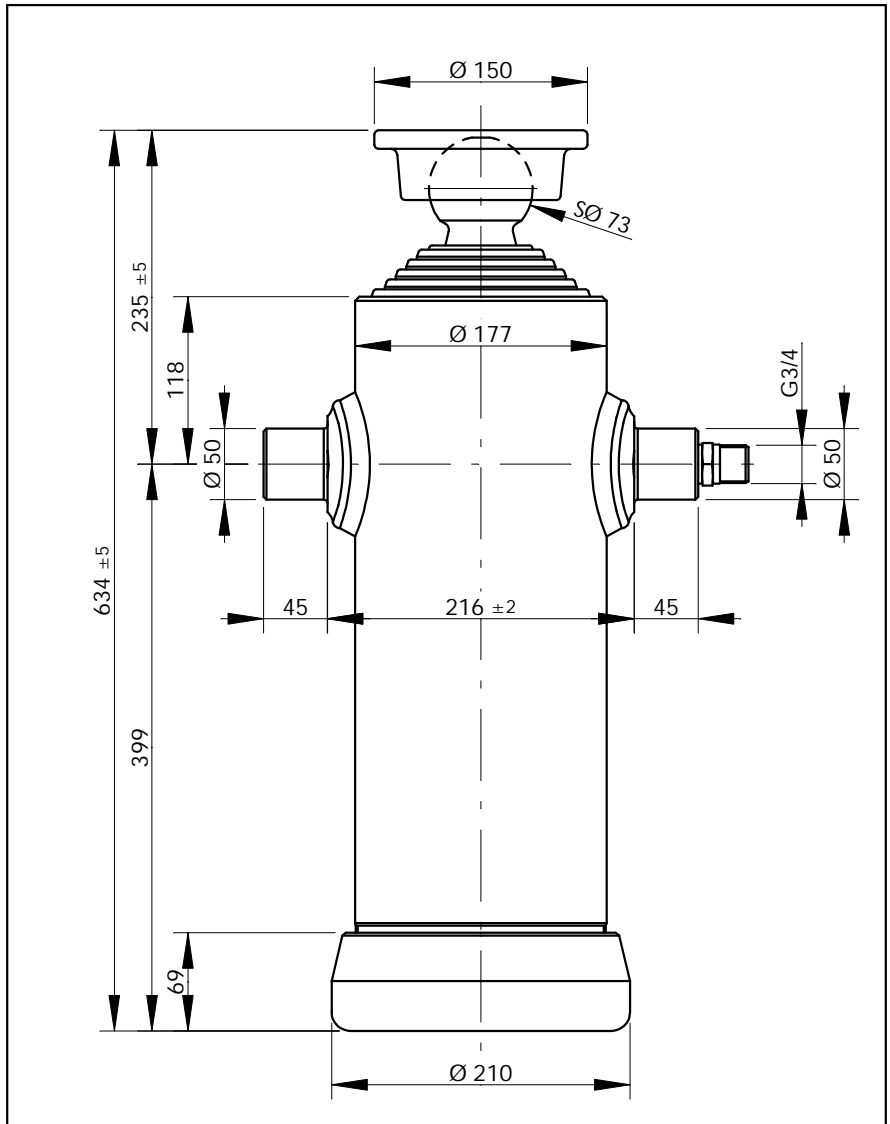

Scala - Scale - Échelle - Maßstab: 1:5

TIPO TYPE TYPE TYP	N. SFILATE EXTENSION N. N. DES HALLONGES STUFENZAHL	CORSA UTILE - POWER STROKE COURSE DE TRAVAIL - GESAMTHUB											MASSA MASSE MASSE	OLIO ASSORBITO OIL CONSUMPTION HUILE CONSOMMEE OELVERBRAUCH		
		I	II	III	IV	V	VI	VII	VIII	IX	X	tot				
		mm													kg	dm ³
SLO3/6 phz. 1SLO36P	6	387	385	393	394	394	395						2348	85	24.8	19.4

CODICE CODE CODE BESTELL-Nr.	Massa totale ribaltabile in [ton] Total mass tip-up in [ton] Masse totale rebatable en [tons] Gesamtkippmasse in [ton]		
	PRESSIONE DI LAVORO MASSIMA: MAXIMUM WORKING PRESSURE: PRESSION D'UTILISATION MAXIMUM: MAXIMUMBETRIEBDRUCK:	200 [bar]	SPINTA MASSIMA - MAXIMUM THRUST: POUSSEE MAXIMUM - MAX SCHUBKRAFT:
emesso: 2004.10.01 modello "Figurino"			

Realizzato:

Visto: